

Reduced Order Framework for 2D Heat Transfer Simulation Under Variations of Boundary Conditions Based on Deep Learning Algorithms

Somayeh afzali¹, Mohammad Kazem Moayyedi², Faranak fotouhi³

¹M.Sc. in Computer Eng, Department of Computer Engineering, University of Qom, Iran
Afzali_somayeh@yahoo.com

²Assistant Professor, CFD, Turbulence and Combustion Research Lab., Department of Mechanical Engineering, University of Qom, Iran
moayyedi@qom.ac.ir

³Assistant Professor, Department of Computer Engineering, University of Qom, Iran
f-fotouhi@qom.ac.ir

Abstract

Due to the high computational cost of the direct numerical simulation methods of the governing equations of some natural phenomena, surrogate models based on machine learning methods such as deep learning algorithms have been commonly interested for modeling these phenomena. In this paper introduces a reduced order model based on deep learning algorithm have been proposed to simulate temperature changes in a two-dimensional field. This model is developed using three different methods, including a framework based on convolutional neural networks, Physics Informed Loss Function of the phenomenon and a reduced-order model using autoencoder method. The model outcomes were compared with the results obtained from a high-resolution finite difference method. The results show that the reduced-order model (with an accuracy of 2.528×10^{-6} °C) has higher accuracy than the other two models. While the Model-based Physics Informed Loss, is superior to the other two models in terms of steady-state temperature data consumption (only 400 data of size 8×8).

Keywords: Steady-state heat transfer, Convolutional Neural Networks, Autoencoder, Reduced Order Model, Mean squared error

1. Introduction

The Partial differential equations are one of the main tools in modeling many phenomena in real life. Some phenomena in nature do not have a definite physical equation and any changes in its behavior cannot be interpreted by a comprehensive law. In addition, many of the governing equations are nonlinear and very complex partial differential equations, so their solution obtained very difficult and usually cannot be solved by mathematical methods. The numerical solution of this equations needs large computation time. In return, deep learning algorithms can instantly simulate complex phenomena without any knowledge of the

governing laws [1-3]. Unlike conventional methods, deep-learning models learn to use data-driven methods to generate realistic solutions and greatly reduce the amount of required computation while they have high accuracy. Deep learning algorithms can be used to infer and simulate any dynamic phenomenon by receiving data from observations or simulations. They can also be used directly to learn and predict phenomena which are complex or still unknown.

In recent years, many advances in machine vision and natural language processing have been made through deep learning [4-6]. Deep learning methods with the possibility of

encrypting appropriate information about the dynamics of the system on the neural network make it possible to teach the neural network how the dynamic system works. Even if it is unknown and does not have access to the physical laws of the dynamical system data. It performs modeling of complex systems faster, more accurately and lower computational cost. According to Andrew Ng, founder, and leader of Google Brain, "Deep learning is like a rocket that its engine is deep learning models, and its fuel are huge amounts of data that are fed to these algorithms" [7].

The present study investigates the simulation of the heat transfer in a two-dimensional field. In 2-D heat transfer problem, we consider a square plate made of some thermally conductive material that is insulated along its edges. Heat is applied to the plate in some way, and our goal is to model the way that thermal energy moves through the plate. The initial condition is given by $T(x, y, 0)$, and we want to determine the temperature field on the plate over time. Under ideal assumptions, it can be shown that temperature satisfies the two dimensional heat diffusion equation:

$$\frac{\partial T}{\partial t} = C^2 \nabla^2 T = C^2 \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right) \quad (1)$$

where $C > 0$ is a constant for the thermal conductivity of the plate. We want to study about the solutions that do not vary with time, known as the steady-state solution of the system:

$$\frac{\partial T}{\partial t} = 0 \quad (2)$$

Therefore, the Laplace equation is obtained:

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} = 0 \quad (3)$$

One of the methods can be used to simulate heat transfer is based on reduced order models. This method focuses exclusively on the important point of potentially reducing the computational and time costs of simulation [8]. For this purpose, it presents an equation free

reduced order model that uses dimension reduction methods to faster simulation of the steady-state heat transfer.

This research focuses to develop a data-driven model for simulation of the two-dimensional steady state heat transfer according to the variations of boundary conditions. The goal is to introduce and analyze different methods based on deep learning algorithms to be used instead of complex and time-consuming numerical or direct solutions to the governing equations. In this work, these methods are evaluated from broader aspects such as accuracy and data consumption in addition to time and computational cost aspects, and the best and most efficient ones in that aspect are introduced. the methods and models presented in this research have been implemented using the tools and libraries available in the Python environment.

2. Surrogate model based on deep learning algorithms

This section introduces the models based on the deep learning algorithms. These models include model-based convolutional neural network, Physics informed loss function of the phenomenon and reduced-order model using autoencoder method.

2.1 Model-based convolutional neural network

In this method, a network consisting of multiple convolutional layers is used, which produces the steady-state temperature distribution by receiving the desired boundary conditions. the training of this network is done in a supervised method, and for this, the data with different boundary conditions are used in the form of a two-dimensional vector as input and the corresponding steady-state temperature data as label. this model can predict two dimensional steady-state temperature distribution as a vector.

The network architecture used in this model consists of a two-dimensional convolutional

encoder-decoder network adapted from the *U-Net* architecture in reference [9]. Ten thousand steady-state temperature data in size of 64×64 have been used to train this network.

2.2 Model-based convolutional kernel containing the desired phenomenon pattern

In this method, the aim is to train a fully convolutional neural network to directly infer the solution to the Laplace equation (3) when given the boundary conditions as input [10]. This accomplishes without ever seeing solutions to the boundary problem by encoding the differential equations into a physics-informed loss function, which motivates the main network to find the solution without the use of supervision in the form of data. The architecture of the network is the same as the *U-Net* network architecture used in the previous model. The table 1 shows the kernel containing the equilibrium conditions pattern, which is obtained from training the network (on 400 data of size 8×8) and is used to train the main network through the loss function defined in equation 4.

Table (1): The kernel resulting from the training of the network [10]

2.21×10^{-6}	-2.52×10^{-2}	3.45×10^{-7}
-2.52×10^{-2}	1.01×10^{-1}	-2.52×10^{-2}
3.20×10^{-7}	-2.51×10^{-2}	3.24×10^{-5}

$$loss = mean(Conv2D(kernel, output))^2 \quad (4)$$

2.3 Reduced-order model using autoencoder method


To develop the model, in the first step, the steady-state heat transfer data with different

boundary conditions (containing 10,000 data in the size of 64×64) are collected. After normalization and conversion to one-dimensional vectors, it projects on a low dimensions space using the autoencoder method. Then different boundary conditions were used as training data and the data generated with low dimensional model were used as a label for training a network consisting of dense layers. This network predicts the steady-state temperature distribution as a reduced vector by receiving the desired boundary conditions in the form of four temperatures related to the 4 faces of the desired control volume. Then, in the next step, in order

to obtain the steady-state temperature in the high dimensions, the pattern extracted from the training data is applied to the data generated from the network using the desired dimension reduction method in the opposite direction (in order to increase the dimensions).

3. Results

Figure 1 shows the results of steady-state heat transfer modeling in size of 64×64 using different methods. The results show that the error in terms of the mean squared error for model based on convolutional neural network, based on Physics Informed Loss Function of the phenomenon and reduced-order model using the autoencoder method were equal to 0.015, 0.23 and 2.528×10^{-6} °C per-pixel, respectively.

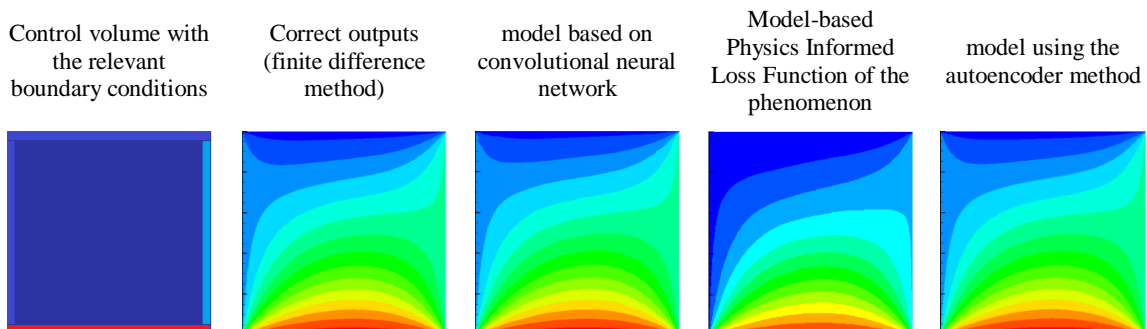

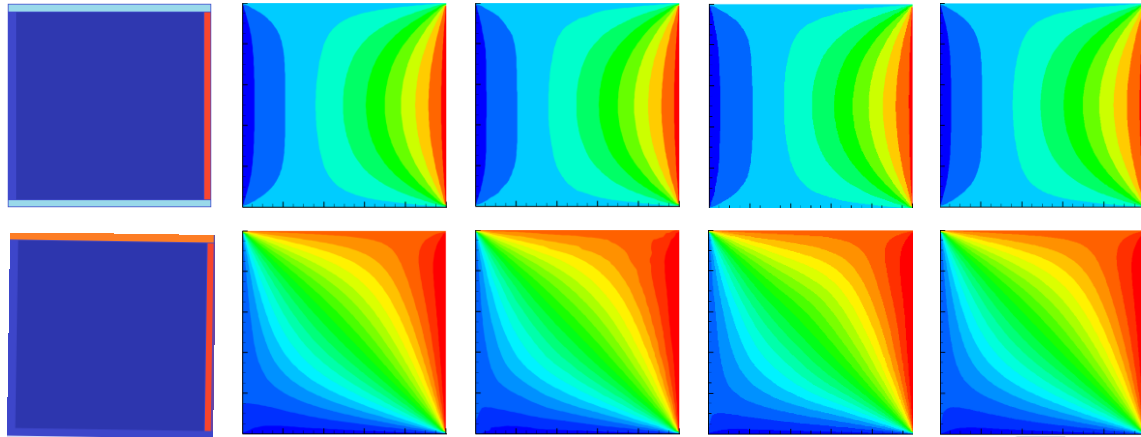


Figure (2): Results of simulation of steady-state temperature distribution using different methods in different boundary conditions in size of 64×64 .

4. Conclusion

In this research, three methods based on deep learning algorithm were used to simulate the steady-state heat transfer in size of 64×64 and their results were compared with the high resolution finite difference method (as the exact data). According to the results, reduced order model using autoencoder method and model based convolutional neural network have higher modeling accuracy. But both models used large amounts of data to simulate steady-state heat transfer. In contrast, the model based on Physics Informed Loss Function of the phenomenon, despite its lower accuracy, requires much less data (only 400 data of size 8×8) to model steady-state heat transfer.

Reference

- [1] Tompson, J, Schlachter, K, Sprechmann, P, Perlin, K. "Accelerating eulerian fluid simulation with convolutional networks", Paper presented at 5th International Conference on Learning Representations, ICLR 2017, Toulon, France, 2019.
- [2] Raissi.M, Yazdani.A, Karniadakis.G, "Hidden Fluid Mechanics: A Navier-Stokes Informed Deep Learning Framework for Assimilating Flow Visualization Data", Division of Applied Mathematics, Brown University, 2018.
- [3] Edalatifar, M, Bagher Tavakoli, M, Ghalambaz, Setoudeh, F, "Using deep learning to learn physics of conduction heat transfer", Journal of Thermal Analysis and Calorimetry, 2020.
- [4] Krizhevsky.A, Sutskever.I, Hinton.G.E. "in Advances in neural information processing systems", pp.1097–1105, 2012.
- [5] Johnson, M., Schuster, M., Le, Q., Krikun, M., Wu, Y., Chen, Z., Thorat, N., Viégas, F., Wattenberg, M., Corrado, G., Hughes, M., & Dean, J, "Google's Multilingual Neural Machine Translation System: Enabling Zero-Shot Translation", Transactions of the Association for Computational Linguistics, 5, pp.339-351, 2017.
- [6] Goodfellow I, Bengio Y, Courville A, "Deep learning", MIT Press, Cambridge, 2016.
- [7] El-Amir.H ,Hamdy.M. ,"Deep Learning Pipeline: Building a Deep Learning Model with TensorFlow", Apress,2019.
- [8] Afzali, Somayeh, Moayyedi, Mohammad Kazem, Fotouhi, Faranak, "Development of an Equation-Free Reduced-order Model Based on Different Approaches of Feature Extraction for Two-dimensional Steady State Heat Transfer Data set", Soft Computing Journal, Vol. 10, No. 1, pp. 16-31, 2021.
- [9] Ronneberger, O. Fischer, P. and Brox, T. "U-Net: Convolutional Networks for Biomedical Image Segmentation", Proceeding of International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer International Publishing, pp.234–241, 2015.
- [10] Sharma., R, Farimani., A, "Weakly-Supervised Deep Learning of Heat Transport via Physics Informed Loss", arXiv:1807.11374, <https://doi.org/10.48550/arXiv.1807.11374>.